



**Part No: GPATTxx100MF29-40**


**2.92mm Attenuators, Male to Female, DC – 32GHz, 100 W**

**ELECTRICAL**

- **Frequency Range** DC – 32GHz
- **Attenuation (dB)**
  - 10 ..... -2.0/+2.8dB
  - 20..... -1.5/+2.2dB
  - 30 ..... -1.2/+1.5 dB
  - 40 ..... -1.2/+1.5dB
- **VSWR (MAX)** DC – 32GHz..... 1.3: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 100Watts Average at 25°C  
PEAK: 500 Watts  
(5 μSec Pulse Width, 10% Duty Cycle)

**MECHANICAL**

- **Connectors** Passivated Stainless Steel or Brass, Gold Plated
- **Connector Pins** Beryllium Copper, Gold Plated

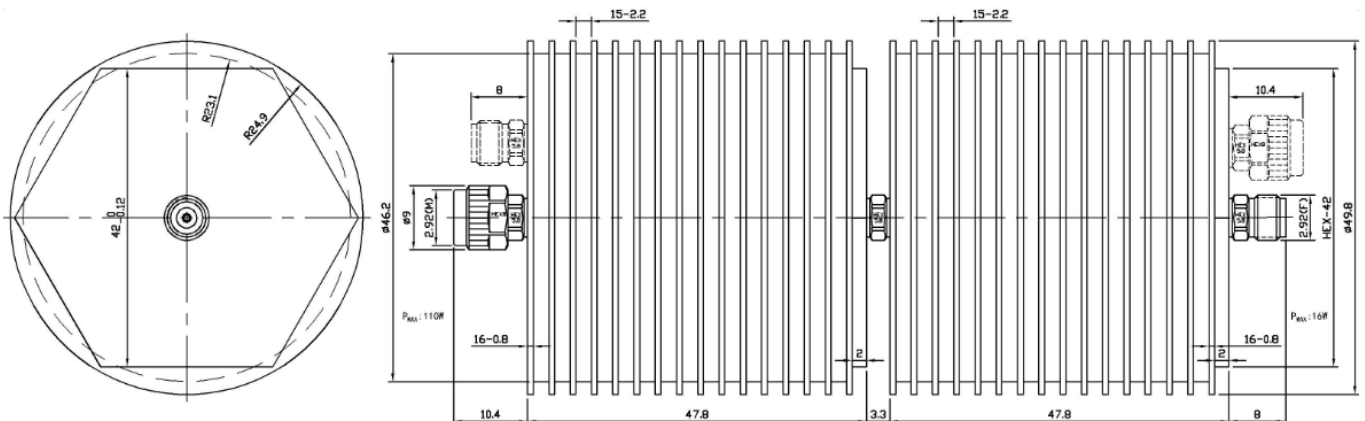

- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

Unit: mm

**ORDER**

Model Number: GPATTxx100MF29-40  
 \_\_\_\_\_ dB Value

