

Part No: GPATTxx2MF29-40


2.92mm Attenuators, Male to Female, DC – 40 GHz, 2W

ELECTRICAL

- **Frequency Range** DC – 40 GHz
- **Attenuation (dB)**
 - 1~7 -0.6/+0.6 dB
 - 7~10 -0.5/+0.5 dB
 - 20 -0.6 /+0.6 dB
 - 30 -0.8/+0.8 dB
 - 40 -1.0/+1.0 dB
- **VSWR (MAX)** DC – 40GHz..... 1.3: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 2 Watts Average at 25°C
PEAK: 125 Watts
(5 μSec Pulse Width , 1% Duty Cycle)

MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Passivated Stainless Steel
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Passivated Stainless Steel
- **Insulators** PTFE, Virgin Electrical Grade

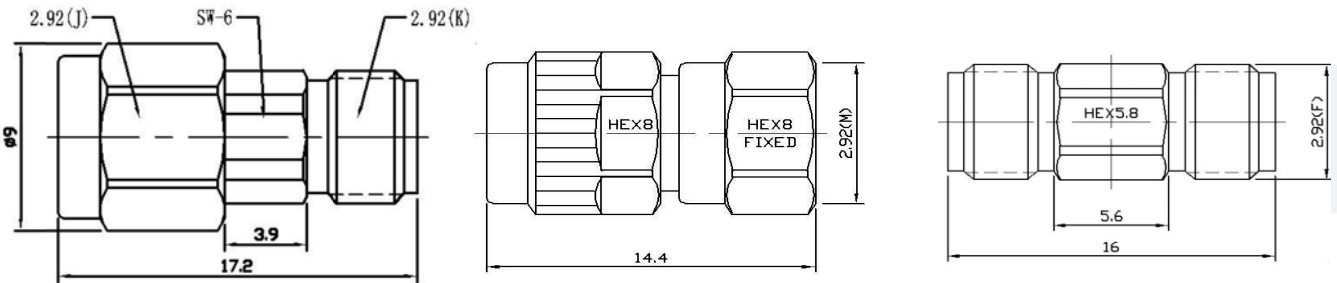

Unit:mm

ORDER

Model Number: GPATTxx2MF29-40
 _____ dB Value