

Part No: GPATTxx50MF29-40

2.92mm Attenuators, Male to Female, DC – 40 GHz, 50 W

ELECTRICAL

- **Frequency Range** DC – 40 GHz
- **Attenuation (dB)**
 - 10 -2.0/+2.5 dB
 - 20 -2.0/+3.0 dB
 - 30 -2.0/+3.0 dB
 - 40 -2.0/+3.0 dB
- **VSWR (MAX)** DC – 40GHz..... 1.35: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 50 Watts Average at 25°C
PEAK: 200 Watts
(5 μSec Pulse Width , 10% Duty Cycle)


MECHANICAL

- **Connectors** Passivated Stainless Steel or Brass , Gold Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum
- **Insulators** PEI

ORDER

Model Number: GPATTxx50MF29-40
 _____ dB Value

10dB:

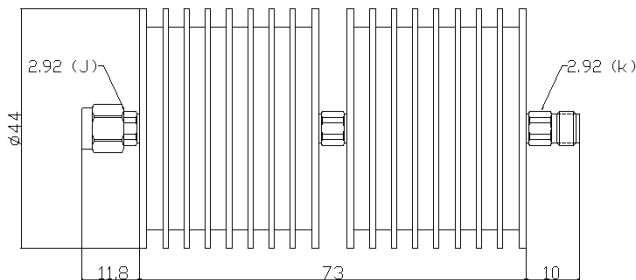

20 ,30 ,40dB:

Unit: mm

