




Part No: GPDCBNMNF-18

5MHz-18GHz, 50V, N-Type, Male to Female DC Block

Electrical:

Frequency:	5MHz-18GHz
Insertion Loss:	0.6 dB Max
VSWR:	1.25 Max
DC Voltage:	50 Volts
Impedance:	50 Ohms

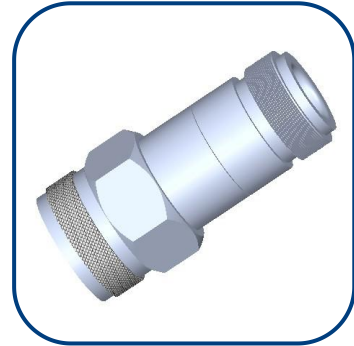

Mechanical:

Operating Temperature:	-55 ~ +165°C
Storage Temperature:	-55 ~ +165°C
Body Material:	Standard Steel 303
Center Conductor:	BeCu, Golden
Connectors:	N Male to N Female
Relative Humidity:	0 ~ 90%

Outline Drawing:

Unit: mm (inches)

