



Part No: GPDCB24M24M-50

5MHz-50GHz, 60V, 2.4mm Male to Male DC Block

Electrical:

Frequency:	5MHz-50GHz
Insertion Loss:	0.5 dB Max
VSWR:	1.3 Max
DC Voltage:	60 Volts
Impedance:	50 Ohms




Mechanical:

Operation Temperature:	-55~+165°C
storage Temperature:	-55~+165°C
Body Material:	Stainless Steel 303
Center conductor:	BeCu, Golden
Connectors:	2.4mm Male to Male
Relative Humidity:	0 ~ 90%

Outline Drawing:

Unit: mm(inches)

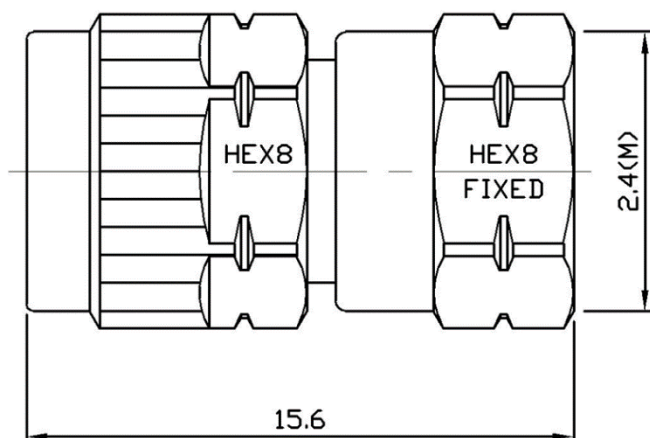

Test Curve

