

Part No: GPATTxx2MF24-50


2.4mm 2 Watt Attenuators • Male to Female • DC –50 GHz

ELECTRICAL

- **Frequency Range** DC –50GHz
- **Attenuation Accuracy**
 - 1 to 3 dB:** -0.5/+1.0 dB
 - 4 to 15 dB:** -0.8/+1.2 dB
 - 16 to 30 dB:** -1.0/+1.2 dB
- **VSWR (MAX)** DC –50GHz.....1.3
- **Impedance** 50 Ohms
- **RF Power Rating** 2 Watts Average at 25°C

MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Passivated Stainless Steel
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Passivated Stainless Steel
- **Insulators** PEI

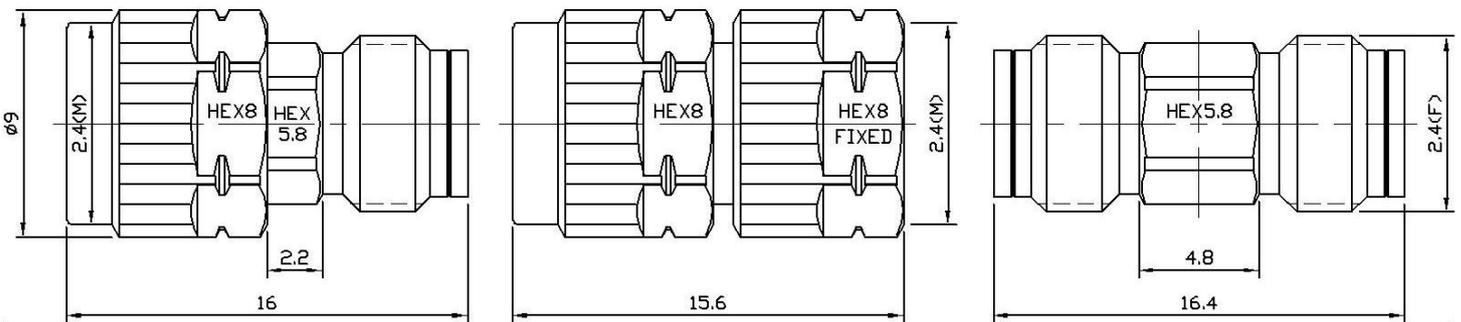

Unit:mm

ORDER

Model Number: GPATTxx2MF24-50

