



Part No: GPATTxx2MF24-50


2.4mm Attenuators • Male to Female • DC –50 GHz- 2W

ELECTRICAL

- Frequency Range DC –50GHz
- Attenuation (dB)
 - 1~3.....-0.5/+1.0 dB
 - 4~15..... -0.8/+1.2 dB
 - 16~30.....-1.0/+1.2 dB
- VSWR (MAX) DC –50GHz.....1.3:1
- Impedance 50 Ohms
- RF Power Rating 2 Watts Average at 25°C
PEAK: 100 Watts
(5 μSec Pulse Width , 1% Duty Cycle)

MECHANICAL

- Temperature Range -55°C - +125°C
- Connectors Passivated Stainless Steel
- Connector Pins Beryllium Copper, Gold Plated
- Body Passivated Stainless Steel
- Insulators PEI

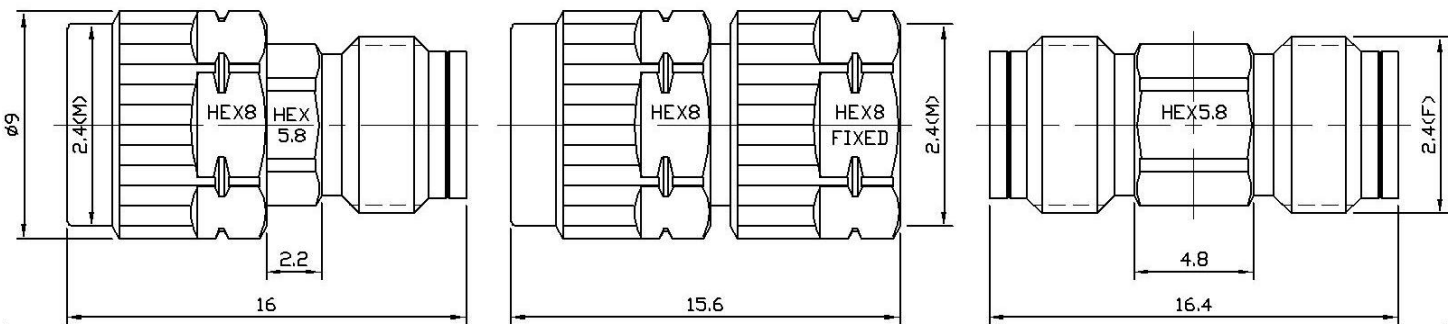

ORDER

Model Number: GPATTxx2MF24-50

