



Part No: GPATTxx2MF18-67

1.85mm 2Watt Attenuators • Male to Female • DC –67GHz

ELECTRICAL


• Frequency Range	DC –67GHz	
• Attenuation Accuracy	<b>1 dB:</b>	0.57 /1.43 dB
	<b>2 dB:</b>	1.65/2.55 dB
	<b>3 dB:</b>	2.62/3.45 dB
	<b>4 dB:</b>	3.77/4.76 dB
	<b>5 dB:</b>	4.56/5.55 dB
	<b>6 dB:</b>	5.54/6.44 dB
	<b>8 dB:</b>	7.64/8.47 dB
	<b>10 dB:</b>	9.77/10.4 dB
	<b>20 dB:</b>	19.92/20.57 dB
	<b>30 dB:</b>	29.9/30.25 dB

- VSWR (MAX) DC –67GHz.....1.3
- Impedance 50 Ohms
- RF Power Rating 2 Watts Average at 25°C

MECHANICAL

- Temperature Range -55°C - +125°C
- Connectors Passivated Stainless Steel
- Connector Pins Beryllium Copper, Gold Plated
- Body Passivated Stainless Steel
- Insulators PEI

ORDER

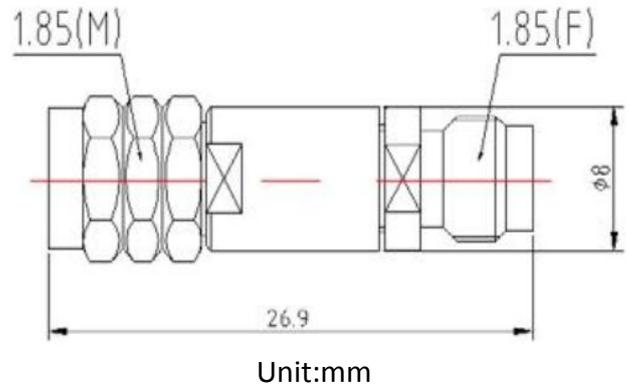

Model Number: GPATTxx2MF18-67

