




WR22 Twisted Waveguide, 32.9 - 50.1GHz, Flange

Dimensions(mm) Tolerance $\pm 1\%$

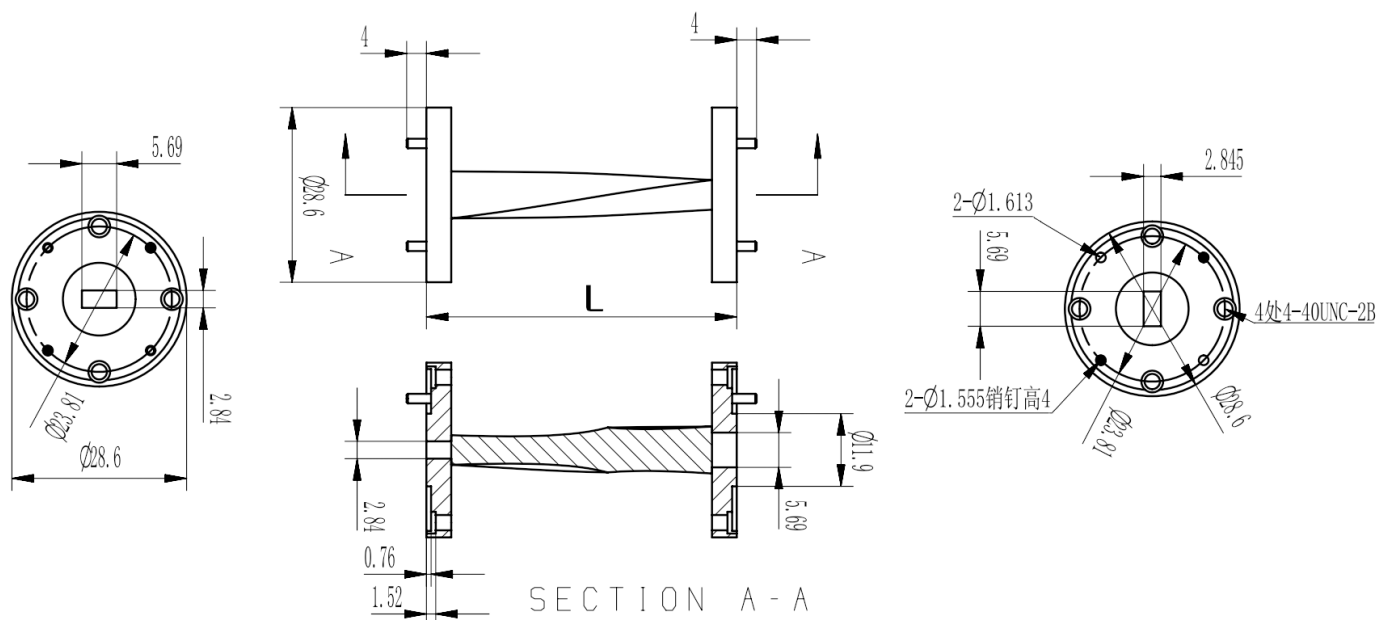

Electrical & Environmental

Frequency Range	32.9-50.1GHz
VSWR	<1.2 Max
Temperature Range	-55°C~+85°C

Product Selection , Customizable		
Gigaphase P / N	L (m m)	IL(dB)
GPWGTWWR22-1 inch	25.4	≤0.25

Mechanical & Product Information

Product Number	GPWGTWWR22-L
Product Type	Twisted Waveguide
Waveguide 1	WR22(R400), UG-383/U Flange
Waveguide 2	WR22(R400), UG-383/U Flange
Waveguide Body	Copper, gold plated
Center Contact	Copper, gold plated