




WR28 Twisted Waveguide, 26.3 - 40GHz, Flange

Dimensions(mm) Tolerance $\pm 1\%$

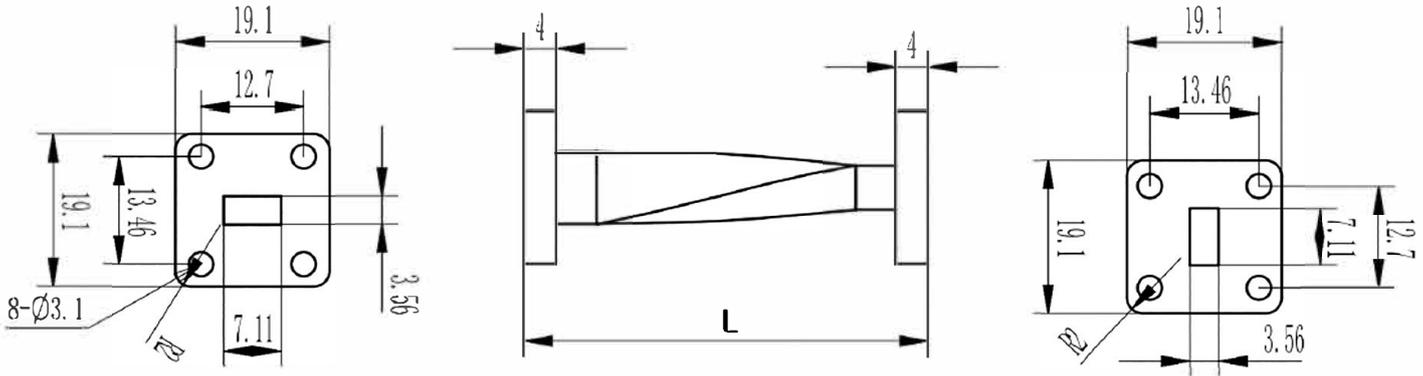

Electrical & Environmental

Frequency Range	26.3-40GHz
VSWR	<1.2 Max
Temperature Range	-55°C~+85°C

Product Selection, Customizable

P/N - L	L(mm)	IL(dB)
GPWGTWWR28-L	50	≤0.20

Mechanical & Product Information

Product Number	GPWGTWWR28-L
Product Type	Twisted Waveguide
Waveguide 1	WR28, Flange
Waveguide 2	WR28, Flange
Waveguide Body	Copper, grey painted
Center Contact	Copper, pickling

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.